

safety



wieland



***safety* from A to Z**
Product Portfolio 2017





Fit for *safety* with Wieland

Safety Technology from A to Z

Wieland supports and advises you – from the planning stage right through to start-up – throughout the entire life cycle of a machine or production system. The broad portfolio of safety switching devices covers all important safety functions and fulfills even complex customer requirements.

SISTEMA – safety of machine controls

The **SISTEMA** software provides developers and testers of safety-related machine controls with comprehensive support when assessing safety within the scope of **EN ISO 13849-1**.

The name **SISTEMA** comes from the German “**S**icherheit von **ST**eueringen an **MA**schinen” (safety of machine controls). The tool allows you to reproduce the structure of the safety-related control elements on the basis of the intended architectures and then enables an automated calculation of the reliability values at various levels of detail, including the performance level (PL) attained.

Training & Support

Wieland Electric offers a range of workshops about the topic of machine safety.

The training covers hazard and risk analysis, definition of the necessary safety functions using the **SISTEMA** tool and support for selecting and implementing the necessary technical safety measures.

We provide our safety workshops and product training sessions both as in-house training and as a workshop at our modern Sales and Marketing Center in Bamberg.

- Risk assessment and risk reduction in accordance with EN 12100
- Definition of technical safety measures
- Assessment of safety functions (SISTEMA)
- Product training
- Training for **samos**[®]PLAN 6
- Seminar Certified Safety Engineer (in collaboration with SGS-TUEV Saar)

Simply contact us at **+49 951 9324 999** or via e-mail at **safety@wieland-electric.com**




Overview of safety technology

From the **sensor**^{PRO} safety sensors to the **safe**^{RELAY} safety relay family and the modular **samos**[®] safety modules to the **samos**[®]**PRO** safety controllers, Wieland Electric offers the right product for your needs.



Safe signal acquisition
sensor^{PRO}

Universal safety relays
safe^{RELAY}

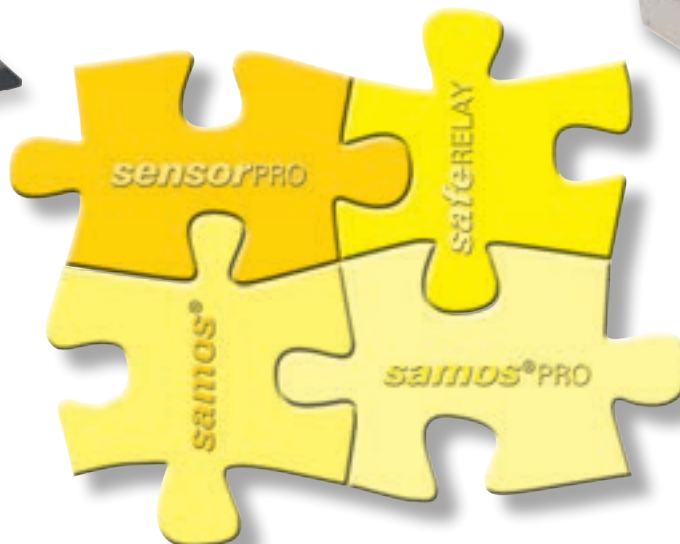

Modular safety modules
samos[®]

Compact safety controllers
samos[®] PRO COMPACT



Tested technology

Of course, Wieland Electric offers only thoroughly tested and certified safety technology (i.e., all technical safety products have been approved by recognized testing institutes and meet current regulations and standards).

Overview – Basic devices

Type	SNO 4083KM	SNO 4062K/KM	SNO 4063K/KM	SNA 4043K/KM	SNA 4044K/KM	SNA 4063K/KM	SNA 4064K/KM
Page	34	36	38	40	40	42	42
Application							
Input Circuits							
	CH1 t _{sync} CH2	0,5 1,5					
Start							
Contacts							
Characteristics							
Rated voltage DC (V)	24	24	12 24	24	24	24	24
Rated voltage AC (V)	115-230		24 115-120 230	24 115-120 230	24 115-120 230	24 115-120 230	24 115-120 230

¹⁾ PLe contact expansion

²⁾ 24 V devices only

³⁾ possible only in isolated cases and according to the risk assessment of the machine functions

	SNO 4003K	SNO 1012K	SNS 4074K/4084K	SVM 4001K	SNT 4M63K	SNZ 4052K	SNZ 1022K
	44	46	48	50	52	54	56
	24	24	24	24	24	24	24
	24 115-120 230	24			24 115-120 230	24 115-120 230	24 115-230

For glossary, see page 11

Overview – Basic devices with time function

Type	SNV 4063KL	SNV 4063KP	SNV 4074SL	SNV 4076SL	SNV 4274SL	SNV 4074ST		
Page	58	60	62	62	64	64		
Application								
Input Circuits								
Start								
Contacts								
Characteristics								
Rated voltage DC (V)	24	24	24	24	24	24		
Rated voltage AC (V)			115-230	115-230	115-230	115-230		

¹⁾ applies to undelayed contacts; the following applies to delayed contacts: PL d / category 3 / SILCL 2

²⁾ depends on the category of the basic device or the safety analysis

Contact expansion relays

	SNE 1	SNE 4003K	SNE 4004K	SNE 4004KV	SNE 4012K	SNE 4024K	SNE 4028S
	66	68	70	70	72	72	74
	24	24	24	24	24	24	24
			24				24 115-230

For glossary, see page 11

Excerpt from the product range

“Safe System Solutions for Automation Technology”

Basic devices

Type	Remarks	Rated voltage	Terminals	Part number
SNO 4083KM-A	1.5 s	24 V DC	Screw terminals, pluggable	R1.188.3580.0
SNO 4083KM-A	1.5 s	115-230 V AC	Screw terminals, pluggable	R1.188.3590.0
SNO 4083KM-C	1.5 s	24 V DC	Push-in terminals, pluggable	R1.188.3600.0
SNO 4083KM-C	1.5 s	115-230 V AC	Push-in terminals, pluggable	R1.188.3610.0
SNO 4083KM-A	0.5 s	24 V DC	Screw terminals, pluggable	R1.188.3830.0
SNO 4083KM-A	0.5 s	115-230 V AC	Screw terminals, pluggable	R1.188.3840.0
SNO 4083KM-C	0.5 s	24 V DC	Push-in terminals, pluggable	R1.188.3850.0
SNO 4083KM-C	0.5 s	115-230 V AC	Push-in terminals, pluggable	R1.188.3860.0
SNO 4062K-A		24 V AC/DC	Screw terminals, pluggable	R1.188.0700.2
SNO 4062KM-A		24 V AC/DC	Screw terminals, pluggable	R1.188.0720.2
SNO 4062K-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.2000.0
SNO 4063K-A		12 V DC	Screw terminals, pluggable	R1.188.1120.0
SNO 4063K-A		24 V AC/DC	Screw terminals, pluggable	R1.188.0990.0
SNO 4063K-A		230 V AC	Screw terminals, pluggable	R1.188.1010.0
SNO 4063K-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.2450.0
SNO 4063KM-A		24 V AC/DC	Screw terminals, pluggable	R1.188.1280.0
SNA 4043K-A		24 V AC/DC	Screw terminals, pluggable	R1.188.1810.0
SNA 4043K-A		230 V AC	Screw terminals, pluggable	R1.188.1840.0
SNA 4043K-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.1940.0
SNA 4043KM-A		24 V AC/DC	Screw terminals, pluggable	R1.188.3250.0
SNA 4043KM-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.3400.0
SNA 4044K-A		24 V AC/DC	Screw terminals, pluggable	R1.188.1860.0
SNA 4044-A		230 V AC	Screw terminals, pluggable	R1.188.1860.0
SNA 4044K-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.1960.0
SNA 4044KM-A		24 V AC/DC	Screw terminals, pluggable	R1.188.1480.0
SNA 4044KM-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.3410.0
SNA 4063K-A		24 V AC/DC	Screw terminals, pluggable	R1.188.1440.0
SNA 4063K-A		230 V AC	Screw terminals, pluggable	R1.188.1460.0
SNA 4063K-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.1950.0
SNA 4063KM-A		24 V AC/DC	Screw terminals, pluggable	R1.188.3290.0
SNA 4063KM-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.3420.0
SNA 4064K-A		24 V AC/DC	Screw terminals, pluggable	R1.188.1900.0
SNA 4064K-A		230 V AC	Screw terminals, pluggable	R1.188.1930.0
SNA 4064K-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.1970.0
SNA 4064KM-A		24 V AC/DC	Screw terminals, pluggable	R1.188.3360.0
SNA 4064KM-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.3430.0
SNO 4003K-A		24 V AC/DC	Screw terminals, pluggable	R1.188.0500.1
SNO 4003K-A		115-120 V AC	Screw terminals, pluggable	R1.188.0900.1
SNO 4003K-A		230 V AC	Screw terminals, pluggable	R1.188.0910.1
SNO 4003K-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.1990.0
SNO 1012K-A		24 V AC/DC	Screw terminals, pluggable	R1.188.3740.0
SNO 1012K-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.3750.0
SNS 4074K-A	0.5 - 99 Hz	24 V DC	Screw terminals, pluggable	R1.188.3640.0
SNS 4074K-C	0.5 - 99 Hz	24 V DC	Push-in terminals, pluggable	R1.188.3650.0
SNS 4074K-A	0.1 - 9.9 Hz	24 V DC	Screw terminals, pluggable	R1.188.3620.0
SNS 4074K-C	0.1 - 9.9 Hz	24 V DC	Push-in terminals, pluggable	R1.188.3630.0
SNS 4084K-A	0.5 - 99 Hz	24 V DC	Screw terminals, pluggable	R1.188.3480.0
SNS 4084K-C	0.5 - 99 Hz	24 V DC	Push-in terminals, pluggable	R1.188.3490.0
SNS 4084K-A	0.1 - 9.9 Hz	24 V DC	Screw terminals, pluggable	R1.188.3660.0
SNS 4084K-C	0.1 - 9.9 Hz	24 V DC	Push-in terminals, pluggable	R1.188.3670.0
SNT 4M63K-A		24 V AC/DC	Screw terminals, pluggable	R1.188.1050.0
SNT 4M63K-A		230 V AC	Screw terminals, pluggable	R1.188.1070.0
SNT 4M63K-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.2390.0
SNZ 4052K-A	0.5 s	24 V AC/DC	Screw terminals, pluggable	R1.188.0530.1
SNZ 4052K-A	0.5 s	115-120 V AC	Screw terminals, pluggable	R1.188.0940.1
SNZ 4052K-A	0.5 s	230 V AC	Screw terminals, pluggable	R1.188.0950.1
SNZ 4052K-C	0.5 s	24 V AC/DC	Push-in terminals, pluggable	R1.188.2020.0
SNZ 1022K-A	0.5 s	24 V AC/DC	Screw terminals, pluggable	R1.188.3700.0
SNZ 1022K-A	0.5 s	115-230 V AC	Screw terminals, pluggable	R1.188.3710.0
SNZ 1022K-C	0.5 s	24 V AC/DC	Push-in terminals, pluggable	R1.188.3720.0
SNZ 1022K-C	0.5 s	115-230 V AC	Push-in terminals, pluggable	R1.188.3730.0

Basic devices with time function

Type	Synchronous time	Rated voltage	Terminals	Part number
SNV 4063KL-A	3 s	24 V DC	Screw terminals, pluggable	R1.188.0620.0
SNV 4063KL-A	30 s	24 V DC	Screw terminals, pluggable	R1.188.0640.0
SNV 4063KL-C	3 s	24 V DC	Push-in terminals, pluggable	R1.188.2010.0
SNV 4063KL-C	30 s	24 V DC	Push-in terminals, pluggable	R1.188.3900.0
SNV 4063KP-A	3 s	24 V DC	Screw terminals, pluggable	R1.188.0660.0
SNV 4063KP-A	30 s	24 V DC	Screw terminals, pluggable	R1.188.0680.0

Basic devices with time function

Type	Time	Rated voltage		Terminals	Part number	
		24 V DC	115-230 V AC		24 V DC	115-230 V AC
SNV 4074SL-A	3 s	24 V DC	115-230 V AC	Screw terminals, pluggable	R1.188.2130.0	R1.188.2310.0
SNV 4074SL-A	30 s	24 V DC	115-230 V AC	Screw terminals, pluggable	R1.188.2160.0	R1.188.2340.0
SNV 4074SL-A	300 s	24 V DC	115-230 V AC	Screw terminals, pluggable	R1.188.2190.0	R1.188.2370.0
SNV 4074SL-C	3 s	24 V DC	115-230 V AC	Push-in terminals, pluggable	R1.188.2140.0	R1.188.2320.0
SNV 4074SL-C	30 s	24 V DC	115-230 V AC	Push-in terminals, pluggable	R1.188.2170.0	R1.188.2350.0
SNV 4074SL-C	300 s	24 V DC	115-230 V AC	Push-in terminals, pluggable	R1.188.2200.0	R1.188.2380.0
SNV 4076SL-A	3 s	24 V DC	115-230 V AC	Screw terminals, pluggable	R1.188.2040.0	R1.188.2220.0
SNV 4076SL-A	30 s	24 V DC	115-230 V AC	Screw terminals, pluggable	R1.188.2070.0	R1.188.2250.0
SNV 4076SL-A	300 s	24 V DC	115-230 V AC	Screw terminals, pluggable	R1.188.2100.0	R1.188.2280.0
SNV 4076SL-C	3 s	24 V DC	115-230 V AC	Push-in terminals, pluggable	R1.188.2050.0	R1.188.2230.0
SNV 4076SL-C	30 s	24 V DC	115-230 V AC	Push-in terminals, pluggable	R1.188.2080.0	R1.188.2260.0
SNV 4076SL-C	300 s	24 V DC	115-230 V AC	Push-in terminals, pluggable	R1.188.2110.0	R1.188.2290.0
SNV 4274SL-A	3 s	24 V DC	115-230 V AC	Screw terminals, pluggable	R1.188.2470.0	R1.188.2650.0
SNV 4274SL-A	30 s	24 V DC	115-230 V AC	Screw terminals, pluggable	R1.188.2500.0	R1.188.2680.0
SNV 4274SL-A	300 s	24 V DC	115-230 V AC	Screw terminals, pluggable	R1.188.2530.0	R1.188.2710.0
SNV 4274SL-C	3 s	24 V DC	115-230 V AC	Push-in terminals, pluggable	R1.188.2480.0	R1.188.2660.0
SNV 4274SL-C	30 s	24 V DC	115-230 V AC	Push-in terminals, pluggable	R1.188.2510.0	R1.188.2690.0
SNV 4274SL-C	300 s	24 V DC	115-230 V AC	Push-in terminals, pluggable	R1.188.2540.0	R1.188.2720.0
SNV 4074ST-A	3 s	24 V DC	115-230 V AC	Screw terminals, pluggable	R1.188.2560.0	R1.188.2740.0
SNV 4074ST-A	30 s	24 V DC	115-230 V AC	Screw terminals, pluggable	R1.188.2590.0	R1.188.2770.0
SNV 4074ST-A	300 s	24 V DC	115-230 V AC	Screw terminals, pluggable	R1.188.2620.0	R1.188.2800.0
SNV 4074ST-C	3 s	24 V DC	115-230 V AC	Push-in terminals, pluggable	R1.188.2570.0	R1.188.2750.0
SNV 4074ST-C	30 s	24 V DC	115-230 V AC	Push-in terminals, pluggable	R1.188.2600.0	R1.188.2780.0
SNV 4074ST-C	300 s	24 V DC	115-230 V AC	Push-in terminals, pluggable	R1.188.2630.0	R1.188.2810.0

Contact expansion relays

Type	Time	Rated voltage	Terminals	Part number
SNE 4003K-A		24 V AC/DC	Screw terminals, pluggable	R1.188.1340.0
SNE 4004K-A		24 V AC/DC	Screw terminals, pluggable	R1.188.0590.0
SNE 4004K-C		24 V AC/DC	Push-in terminals, pluggable	R1.188.1980.0
SNE 4004KV-A	0.5 s	24 V DC	Screw terminals, pluggable	R1.188.0460.0
SNE 4004KV-A	1 s	24 V DC	Screw terminals, pluggable	R1.188.0470.0
SNE 4004KV-A	2 s	24 V DC	Screw terminals, pluggable	R1.188.0480.0
SNE 4004KV-A	3 s	24 V DC	Screw terminals, pluggable	R1.188.0490.0
SNE 4004KV-C	0,5 s	24 V DC	Push-in terminals, pluggable	R1.188.2410.0
SNE 4004KV-C	1 s	24 V DC	Push-in terminals, pluggable	R1.188.2420.0
SNE 4004KV-C	2 s	24 V DC	Push-in terminals, pluggable	R1.188.2430.0
SNE 4004KV-C	3 s	24 V DC	Push-in terminals, pluggable	R1.188.2440.0
SNE 4028S-A		24 V DC	Screw terminals, pluggable	R1.188.3120.0
SNE 4028S-A		115-230 V	Screw terminals, pluggable	R1.188.3510.0
SNE 4028S-C		24 V DC	Push-in terminals, pluggable	R1.188.3540.0
SNE 4028S-C		115-230 V	Push-in terminals, pluggable	R1.188.3550.0

Modular safety modules *samos*[®]

Type	Time	Rated voltage	Terminals	Coding	Part number
samos[®]					
SA-BM-S1-4EKL-A	5 s	24 V DC	Screw terminals, pluggable	1	R1.180.0010.0
SA-BM-S1-4EKL-A	50 s	24 V DC	Screw terminals, pluggable	1	R1.180.0020.0
SA-BM-S1-4EKL-A	5 min	24 V DC	Screw terminals, pluggable	1	R1.180.0030.0
SA-BM-S1-4EKL-C	5 s	24 V DC	Push-in terminals, pluggable	1	R1.180.0360.0
SA-BM-S1-4EKL-C	50 s	24 V DC	Push-in terminals, pluggable	1	R1.180.0370.0
SA-BM-S1-4EKL-C	5 min	24 V DC	Push-in terminals, pluggable	1	R1.180.0380.0

Excerpt from the product range "Safe System Solutions for Automation Technology"

Compact safety controls **samos**[®]PRO

Type	Rated voltage	Terminals	Remarks	Part number
samos [®] PRO				
SP-COP1-A	24 V DC	Screw terminals, pluggable		R1.190.1110.0
SP-COP1-P-A	24 V DC	Screw terminals, pluggable	PLUS version incl. press function	R1.190.1130.0
SP-COP1-C	24 V DC	Push-in terminals, pluggable		R1.190.1120.0
SP-COP1-P-C	24 V DC	Push-in terminals, pluggable	PLUS version incl. press function	R1.190.1140.0
SP-COP2-EN-A	24 V DC	Screw terminals, pluggable		R1.190.1210.0
SP-COP2-EN-P-A	24 V DC	Screw terminals, pluggable	PLUS version incl. press function	R1.190.1230.0
SP-COP2-EN-C	24 V DC	Push-in terminals, pluggable		R1.190.1220.0
SP-COP2-EN-P-C	24 V DC	Push-in terminals, pluggable	PLUS version incl. press function	R1.190.1240.0
SP-COP2-ENI-A	24 V DC	Screw terminals, pluggable		R1.190.1310.0
SP-COP2-ENI-P-A	24 V DC	Screw terminals, pluggable	PLUS version incl. press function	R1.190.1330.0
SP-COP2-ENI-C	24 V DC	Push-in terminals, pluggable		R1.190.1320.0
SP-COP2-ENI-P-C	24 V DC	Push-in terminals, pluggable	PLUS version incl. press function	R1.190.1340.0
SP-SDIO84-P1-K-A	24 V DC	Screw terminals, pluggable	Input-output module, with output test-pulses	R1.190.0030.0
SP-SDIO84-P1-K-C	24 V DC	Push-in terminals, pluggable	Input-output module, with output test-pulses	R1.190.0040.0
SP-SDIO84-P2-K-C	24 V DC	Push-in terminals, pluggable	Input-output module, without output test-pulses	R1.190.0240.0
SP-SDI8-P1-K-A	24 V DC	Screw terminals, pluggable	Input module	R1.190.0050.0
SP-SDI8-P1-K-C	24 V DC	Push-in terminals, pluggable	Input module	R1.190.0060.0
SP-DIO84-K-A	24 V DC	Screw terminal, pluggable		R1.190.1050.0
SP-DIO84-K-C	24 V DC	Push-in terminal, pluggable		R1.190.1060.0
SP-CANopen	24 V DC	CANopen		R1.190.0210.0
SP-PROFIBUS-DP	24 V DC	PROFIBUS-DP		R1.190.0190.0
SP-EN-ETC	24 V DC	ETHERCAT		R1.190.0160.0

Accessories **samos**[®]PRO

Type	Remarks	Part number
samos [®] PRO		
SP-COP-CARD1	Memory-card for SP-COP	R1.190.1000.0
SP-CABLE-USB1	USB cable for SP-COP, 1.8 m	R1.190.1010.0
SP-CABLE-ETH1	Ethernet cable for SP-COP, 2 m	R1.190.1020.0
SP-COP-STARTER-SET	Content: SP-COP2-EN-A, SP-COP-CARD1, SP-PLAN6, SP-CABLE-USB1, SP-CABLE-ETH1	R1.190.1100.0
SP-VISUAL-SET	Visualization set (touch panel 3.5" color, SP-CABLE4, software driver)	R1.190.0280.0
HMISTU655	Visualization set (touch panel 3.5" color)	F0.000.0023.0
HMISTU855	Visualization set (touch panel 5.7" color)	F0.000.0023.1
HMISTO501	Visualization set (touch panel 3.5" monochrome)	F0.000.0023.2
SP-COVER	SD card slot cover for SP-COP modules	R1.190.1040.0
SAFETY SCHRAUBKL.SET	Screw terminal set with 4 different codings for 5 devices	99.208.9999.9
SAFETY PUSH IN SET	Push-in terminal set with 4 different codings for 5 devices	99.209.9999.9
WKFN 2,5 E/35 GO-URL	fasis - multi-tier block with diodes	56.703.8755.9
APFN 2,5 E/35	End plate	07.312.7355.0





- For further products and technical information go to www.wieland-electric.com at our e-catalog.
- Our safety hotline **+49 951 93 24-999** and our e-mail-service safety@wieland-electric.com is available to answer all your questions.

More information is available in the **safety** catalog


Order no: 0860.1


Glossary

 **Emergency stop monitoring**
Floating contacts


 **Protective gate monitoring**
Floating contacts


 **Position monitoring**
Magnetic switch

 **Safety light grid / -light curtain**
acc. to EN 61496 BWS Type 4 / Type 2

 **Two-hand control**
according to EN 574


 **Controlled Stop**
according to EN 60204-1 stop category 1

 **Standstill and motion monitoring**


 **Safety shut-off mat monitoring**
(4-wire principle, short-circuiting)


 **Valve position monitoring**


 **Contact expansion**

 **Machine building industry**

 **Press**

 **Elevator systems**
in accord. with EN 81-1

 **Combustion plants**
according to EN 50156-1

 **Process technology**
according to IEC 61511


 **Finger protection**


 **Hand protection**


 **Arm protection**

 **Access protection**

 **Personal protection**


 **Single-channel input circuit**
1 NC contact or semiconducto


 **Two-channel input circuit**
2 NC contacts or semiconductors


 **Two-channel input circuit, antivalent**
1 NO / 1 NC contacts or semiconductors


 **Cross monitoring**
between two input circuits


 **Synchro-check**
between two input circuits

 **Safe Start**
Start command is accepted only when the input circuits are closed

 **Combi-reset**
Automatic start possible after voltage failure, based on the risk analysis


 **Automatic Reset**
after application of the voltage and/or after safety request


 **Manual Reset**
in the case of a rising edge at the reset input

 **Reset button monitoring**
in the case of a falling edge at the reset input

 **Contacts (NO/NC)**
safe semiconductor outputs


 **Alarm contacts**


 **Safe changeover contacts**

 **Safe semi conductor outputs**

 **Safe OFF-delay**

 **Safe ON-delay**

 **Monoflop**
for rapid tactile applications

 **Reset of time lapse**
for OFF-delayed contacts

 **Expanded diagnostics**



USA & CANADA
Wieland Electric Inc.
North American Headquarters
2889 Brighton Road
Oakville, Ontario L6H 6C9
Phone +1 905 8298414
Fax +1 905 829 413
www.wielandinc.com
www.wieland-electric.ca



GREAT BRITAIN
Wieland Electric Ltd.
Riverside Business Center,
Walnut Tree Close
GB Guildford/Surrey GU1 4UG
Phone +44 1483 531213
Fax +44 1483 505029
sales.uk@wieland-electric.com
www.wieland.co.uk



ITALY
Wieland Electric S.r.l.
Via Edison, 209
I-20019 Settimo Milanese
Phone +39 02 48 916357
Fax +39 02 48 920685
info.italy@wieland-electric.com
www.wieland-electric.it



FRANCE
Wieland Electric SARL.
Le Cérame, Hall 6
47, avenue des Genottes
CS 48313,
95803 Cergy-Pontoise Cedex
Phone +33 1 30320707
Fax +33 1 30320717
info.france@wieland-electric.com
www.wieland-electric.fr



SPAIN
Wieland Electric S.L.
C/ Maria Auxiliadora 2, bajos
E-08017 Barcelona
Phone +34 93 2523820
Fax +34 93 2523825
ventas@wieland-electric.com
www.wieland-electric.es



SWITZERLAND
Wieland Electric AG
Harzachstrasse 2b
CH-8404 Winterthur
Phone +41 52 2352100
Fax +41 52 2352119
info.swiss@wieland-electric.com
www.wieland-electric.ch



BELGIUM & GD LUXEMBOURG
ATEM-Wieland Electric NV
Bedrijvenpark De Veert 4
B-2830 Willebroek
Phone +32 3 8661800
Fax +32 3 8661828
info.belgium@wieland-electric.com
www.wieland-electric.be



DENMARK
Wieland Electric A/S
Vallørækken 26
DK-4600 Køge
Phone +45 70 266635
Fax +45 70 266637
sales.denmark@wieland-electric.com
www.wieland-electric.dk



SWEDEN
Wieland Electric AB
Krossverksgatan 9B
216 16 Limhamn
Phone +46 40 652 90 00
sales.sweden@wieland-electric.com
www.wieland-electric.se



POLAND
Wieland Electric Sp. z o.o.
Św. Antoniego 8
62-080 Swadzim
Phone +48 61 2225400
Fax +48 61 8407166
office@wieland-electric.pl
www.wieland-electric.pl



CHINA
Wieland Electric Trading
Unit 2703 International Soho City
889 Renmin Road,
Huang Pu District
PRC-Shanghai 200010
Phone +86 21 63555833
Fax +86 21 63550090
info-shanghai@wieland-electric.com
www.wieland-electric.cn



JAPAN
Wieland Electric Co, Ltd.
Nisso No. 16 Bldg. 7F
3-8-8 Shin-Yokohama,
Kohoku-ku
Yokohama 222-0033
Phone +81 45 473 5085
Fax +81 45 470 5408
info-japan@wieland-electric.com



GERMANY
Headquarters
Wieland Electric GmbH
Brennerstraße 10 – 14
96052 Bamberg, Germany
Phone +49 951 9324-0
Fax +49 951 9324-198
info@wieland-electric.com
www.wieland-electric.de

Sales Partner:
You can reach us worldwide in more than 70 countries.
Find the contact adress at: www.wieland-electric.com

Subject to technical modifications!
gesis®, **RST**®, **GST**®, **GST18**®, **podis**®, **samos**® and **saris**®
are registered trademarks of Wieland Electric GmbH

**contacts
are
green.**